


ALKALINE/MANGANESE DIOXIDE BATTERY



Size: PX908 (4LR25X)

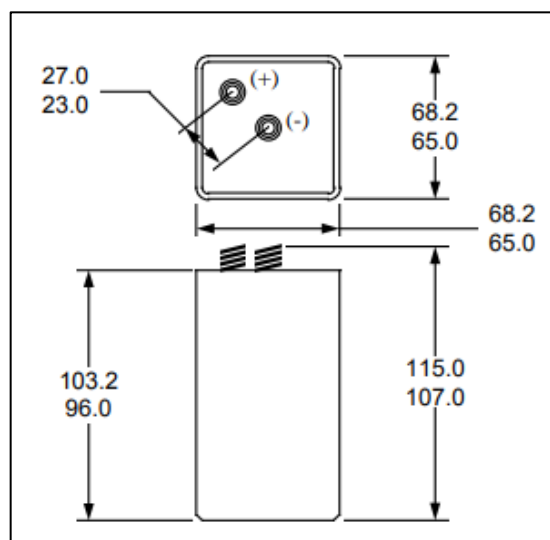

Dimensions shown are ANSI standards

TYPICAL PERFORMANCE

ANSI Test	Load Profile, Cut-off	MAD	Typical Performance
Resistive Load (1)	15.6Ω – 24h/d, 3.6V	37h	38h
Portable Lighting (1)	9.1 Ω – 30m/h, 8h/d, 3.6V	20.5h	22h
Portable Lighting (2)	33 Ω – 30m/h, 8h/d, 3.6V	102.7h	104h
Barricade Light	110 Ω – 12h/d, 3.6V	370h	390h

TYPICAL APPLICATIONS

- Lanterns
- Flashlights

PROCELL®
PROFESSIONAL BATTERIES

Procell Professional batteries
Berkshire Corporate Park
Phone: 1-800-544-5454 (Toll-free)
www.procell.com

ELECTRICAL CHARACTERISTICS

- Typical Voltage (at +20°C) 6.0 – 6.7 V
- Nominal Internal Impedance @ 1kHz 0.6 Ohm

PHYSICAL CHARACTERISTICS

- Typical weight 624g (22 oz.)
- Typical Volume 446 cm³

OPERATING & STORAGE CONDITIONS

- Operating temperature range -20°C to 54°C (-4°F to 130°F)
- Recommended Storage
Storage area should be clean, cool (preferably not exceeding +30°C), dry and ventilated 5°C to 30°C (41°F to 86°F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.